



BASF

We create chemistry

ACRONAL[®] PRO 770 NA

Acrylic dispersion for superior metal protection

Benefits

- Superior corrosion resistance in DTM formulation for C2-C3 applications: fewer coats needed in the field
- Versatile: can be formulated as a primer for C3+ applications
- Excellent application properties (spray, dip, roll, etc.)
- Saves formulation cost: no need for corrosion inhibitors

Features

- Self-crosslinking
- Robust to formulation changes
- Good early water and humidity resistance
- Good adhesion to various metal substrates
- APEO- and zinc-free
- Low VOC capable



For industrial applications needing C1-C3 corrosion protection

Acronal PRO 770 NA


Waterborne DTM with best-in-class performance

**Are you and your customers ready to make the switch to waterborne?
Are you looking to improve the performance of your waterborne formulations?**

Acronal PRO 770 NA is BASF's answer to your need for a high-performance binder with improved corrosion protection (compared to other 1-component water-based binders) at the same dry-film thickness. Use this acrylic dispersion as a direct-to-metal (DTM) coating to reduce application time and save on formulation complexity by eliminating the need for corrosion inhibitors and active pigments.

Acronal PRO 770 NA is APEO- and zinc-free in a waterborne formula, combining best-in-class corrosion protection with environmental benefits.

Benchmarking Acronal PRO 770 NA against competitive DTM resins

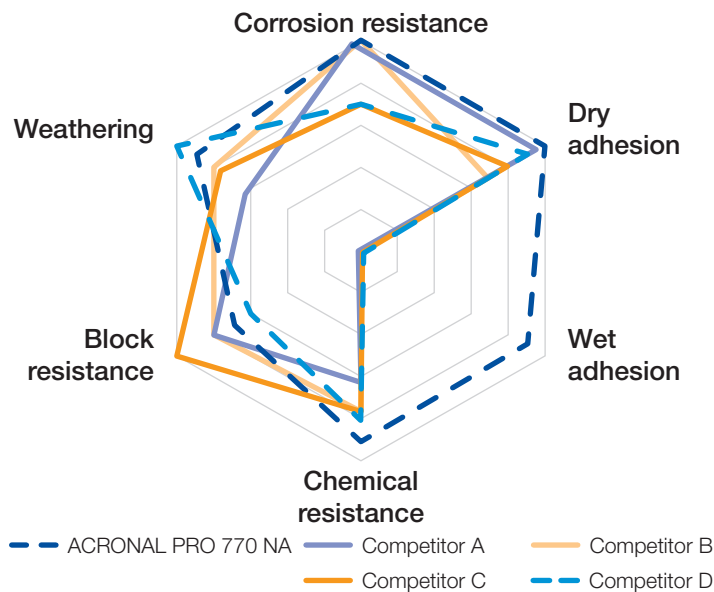

In a benchmarking study looking at more than 20 competitive water-based, 1-component direct-to-metal coatings, Acronal PRO 770 NA was a top performer for corrosion, dry adhesion, wet adhesion, and chemical resistance. It achieves a good balance of block-resistance and flexibility. Contact us for detailed test results.

Application areas:

- Building exteriors in highly industrial areas and/or coastal regions
- Building interiors for food manufacturers, breweries, and dairies
- Steel construction parts
- Exterior tanks

Physical properties

N.V.	50%
Viscosity	300 – 1,000 cps
pH	7.0 – 8.3
Freeze-thaw stable	no
MFFT	~19 °C
Appearance	Milky white emulsion

Contacts

Please contact our technical service department for more help on formulating with products from the ACRONAL line.

North America
USA
Phone: +1 800 231-7868
www.basf.us/dpsolutions

Europe, Africa, West Asia
Netherlands
Phone: +31 513 619-619
resins@basf.com

Asia
China
Phone: +852 2731-0111
dispersions-pigments-asia@basf.com

South America
Brazil
Phone: +55 11 2039-2300
packaging-sa@basf.com

BASF Corporation, 2020. Charlotte, NC.

The data contained in this publication are based on our current knowledge and experience. In view of the many factors that may affect processing and application of our product, these data do not relieve processors from carrying out their own investigations and tests; neither do these data imply any guarantee of certain properties, nor the suitability of the product for a specific purpose. Any descriptions, drawings, photographs, data, proportions, weights etc. given herein may change without prior information and do not constitute the agreed contractual quality of the product. The agreed contractual quality of the product results exclusively from the statements made in the product specification. It is the responsibility of the recipient of our products to ensure that any proprietary rights and existing laws and legislation are observed. When handling these products, advice and information given in the safety data sheet must be complied with. Further, protective and workplace hygiene measures adequate for handling chemicals must be observed. (03/2020)

© = Registered trademark of the BASF Group