

Hydropalat® SL 3682



Highly effective slip and anti-blocking agent for water-based paints, coatings and ink systems

Hydropalat® SL 3682 is an aqueous emulsion of an ultra-high molecular weight silicone providing excellent slip, scratch and mar resistance and anti-blocking properties. Additionally it shows a broad compatibility with different aqueous binder systems and is more sustainable compared to existing market standards as no tin-catalyst or ethylbenzene is used in the formulation.

Hydropalat® SL 3682 is recommended for Furniture and Flooring Coatings, Architectural Coatings and the Printing and Packaging Industry.

Gloss and scratch resistance measured in a coating system based on Joncryl® 8225

Ranking 0 (poor) to 5 (best)

	wo. additive	benchmark A (0.7% addition)	Hydropalat® SL 3682 (0.7% addition)
Gloss			
20°/60°	5.5/31.3	4.6/27.5	4.7/27.7
Finger nail scratch resistance			
after 15 min 50° + 30 min RT	0	3	3
after a day	0	4	4-5
after a week	1	4	4-5

Pendulum hardness and blocking resistance measured in a coating system based on Acronal® LR 9014

Ranking 1 (poor) to 5 (best)

	wo. additive	benchmark A (0.3% addition)	Hydropalat® SL 3682 (0.3% addition)
Pendulum hardness	n.a.	33.6	35.0
Appearance	matt, no craters	matt, no craters	matt, no craters
Blocking - 24h 50°C + 10kg			
Adhesion	2,5	4	4
Tear Off	2,5	4,5	4,5

Hydropalat® SL 3682: Characteristic Values


Property	Value
Solid content	~ 65 %
Density (DIN 51757)	~ 0.98 g/cm ³
Viscosity	~ 3000 mPa.s

Performance Highlights

- Excellent slip and mar resistance
- Excellent anti-blocking properties
- Broad compatibility with different binder systems
- Suitable for both glossy and matt pigmented systems as well as for clear coats (wood coatings)

Sustainability Highlights

- More sustainable vs existing market standards:
 - Tin-free
 - Free of Ethylbenzene

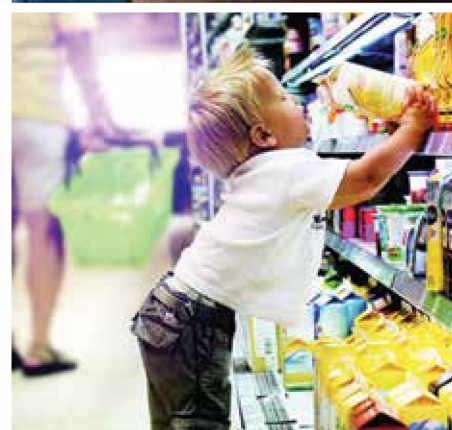

Contacts worldwide

Asia

BASF East Asia Regional Headquarters Ltd.
45/F., Jardine House
No. 1 Connaught Place
Central
Hong Kong
formulation-additives-asia@basf.com

Europe

BASF SE
Formulation Additives
67056 Ludwigshafen
Germany
formulation-additives-europe@basf.com

North America

BASF Corporation
11501 Steele Creek Road
Charlotte, NC 28273
USA
formulation-additives-nafta@basf.com

South America

Rochaverá - Crystal Tower
Av. das Nações Unidas, 14.171
Morumbi - São Paulo-SP
Brazil
formulation-additives-south-america@basf.com

www.basf.com/formulation-additives

The data contained in this publication are based on our current knowledge and experience. In view of the many factors that may affect processing and application of our product, these data do not relieve processors from carrying out their own investigations and tests; neither do these data imply any guarantee of certain properties, nor the suitability of the product for a specific purpose. Any descriptions, drawings, photographs, data, proportions, weights etc. given herein may change without prior information and do not constitute the agreed contractual quality of the product. The agreed contractual quality of the product results exclusively from the statements made in the product specification. It is the responsibility of the recipient of our products to ensure that any proprietary rights and existing laws and legislation are observed. When handling these products, advice and information given in the safety data sheet must be complied with. Further, protective and workplace hygiene measures adequate for handling chemicals must be observed.

® = registered trademark of the BASF Group