



Supporting inks and coatings that will make your piggy bank smile

JONCRYL® 659-A

Efficient colloidal emulsion supporting cost-in-use savings for inks

Key Features & Benefits

- Low cost-in-use due to its high molecular weight and dilutability
- Excellent transfer and color strength
- Good press performance, no misting
- Good compatibility in combination with emulsions and pigment concentrates

Properties


Appearance	White Emulsion
Molecular Weight	80,000
Non Volatile	44%
Viscosity at 25°C	<100 cP
Acid Value	150 mg KOH/g
pH	2.1
Density at 25°C	1.03 g/cm ³
Tg	93°C

JONCRYL® 659-A

Efficient colloidal emulsion supporting cost-in-use savings for inks

JONCRYL 659-A is an efficient colloidal emulsion for use in inks on corrugated board and kraft paper applications.

Colloid Performance

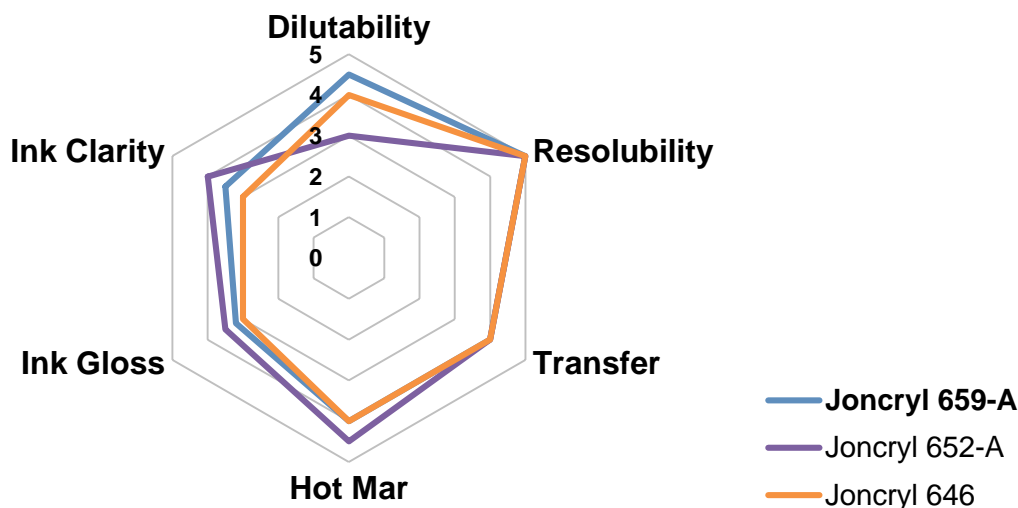

Product Performance Comparison:

- Efficient dilution profile provides cost savings
- Exhibits excellent balance of clarity, dilutability, and heat resistance with high resolubility.

JONCRYL 659-A has been developed for use in inks for both pre-print and post-print corrugated board and kraft paper applications. It provides good transfer and printability at low polymer solids.

Use JONCRYL 659-A to enhance dilutability, heat resistance, and resolubility of:

- Folding Carton Inks
- Corrugated Inks
- Overprint Varnish (OPV)

Contacts

Please contact our technical service department for more help on formulating with products from the JONCRYL product line.

Asia
China
Phone: +852 2731-0111
Dispersions-pigments-
asia@basf.com

Europe, Africa, West Asia
Netherlands
Phone: +31 513 619-619
resins@basf.com

North America
USA
Phone: +1 800 231-7868
www.basf/us/dpsolutions

South America
Brazil
Phone: +55 11 2039-2300
packaging-sa@basf.com

BASF Corporation, Charlotte, NC

The data contained in this publication are based on our current knowledge and experience. In view of the many factors that may affect processing and application of our product, these data do not relieve processors from carrying out their own investigations and tests; neither do these data imply any guarantee of certain properties, nor the suitability of the product for a specific purpose. Any descriptions, drawings, photographs, data, proportions, weights etc. given herein may change without prior information and do not constitute the agreed contractual quality of the product. The agreed contractual quality of the product results exclusively from the statements made in the product specification. It is the responsibility of the recipient of our products to ensure that any proprietary rights and existing laws and legislation are observed. When handling these products, advice and information given in the safety data sheet must be complied with. Further, protective and workplace hygiene measures adequate for handling chemicals must be observed. (01/2018)

© = Registered trademark of the BASF Group