


# Loxanol® OT 5853



## VOC-free open time prolonger for plasters with excellent cold storage stability

Loxanol® OT 5853 is an additive to prolong the 'open time' and workability of latex-based plasters for exterior insulation and finishing systems (EIFS) with high active content and improved cold storage stability. Loxanol® OT 5853 provides apparent elasticity whereby cracks in plasters are avoided to a large extent and additionally it helps minimizing pores on the surface of the plaster.

### Improved cold storage stability

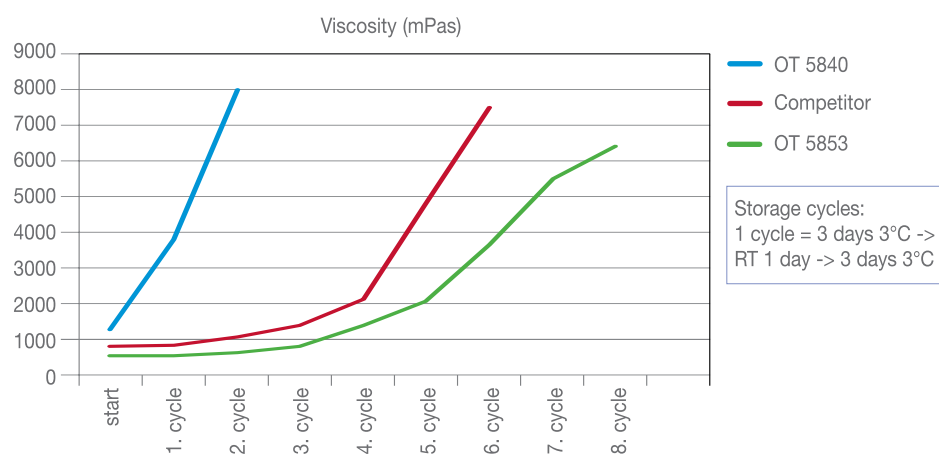

### Performance Highlights

- Improved cold storage stability
- Improved handling (reduced product viscosity (~ 1,000 mPas) at high concentration level (30% active))
- Minimization of pore building

### Sustainability Highlights

- VOC-free according to EU 2004/42 method
- APEO free
- Low odor
- Suitable for achieving the European Ecolabel for "indoor paints and varnishes" 2009/544/EC and for "outdoor paints and varnishes" 2009/543/EC for the final paint

### Reduction of crack formation by using open time prolongers



### Loxanol® OT 5853: Characteristic Values

Property	Value
Appearance	white viscous liquid
Solids	~ 30%
Viscosity	1000 mPas
Density	~ 0.97 g/cm <sup>3</sup>
VOC	< 0.1% acc. To EU 2004/42 (b.p. > 250°C)



## Contacts worldwide

### Asia

BASF East Asia Regional Headquarters Ltd.  
45/F., Jardine House  
No. 1 Connaught Place  
Central  
Hong Kong  
formulation-additives-asia@basf.com

### Europe

BASF SE  
Formulation Additives  
67056 Ludwigshafen  
Germany  
formulation-additives-europe@basf.com

### North America

BASF Corporation  
11501 Steele Creek Road  
Charlotte, NC 28273  
USA  
formulation-additives-nafta@basf.com

### South America

BASF S.A.  
Rochaverá - Crystal Tower  
Av. das Nações Unidas, 14.171  
Morumbi - São Paulo - SP  
Brazil  
formulation-additives-south-america@basf.com

[www.basf.com/formulation-additives](http://www.basf.com/formulation-additives)

The data contained in this publication are based on our current knowledge and experience. In view of the many factors that may affect processing and application of our product, these data do not relieve processors from carrying out their own investigations and tests; neither do these data imply any guarantee of certain properties, nor the suitability of the product for a specific purpose. Any descriptions, drawings, photographs, data, proportions, weights etc. given herein may change without prior information and do not constitute the agreed contractual quality of the product. The agreed contractual quality of the product results exclusively from the statements made in the product specification. It is the responsibility of the recipient of our products to ensure that any proprietary rights and existing laws and legislation are observed. When handling these products, advice and information given in the safety data sheet must be complied with. Further, protective and workplace hygiene measures adequate for handling chemicals must be observed.