

Tinuvin® 123

Product Description


Tinuvin 123 is a liquid hindered amine light stabilizer (HALS) based on an amino-ether functionality.

Key Features & Benefits

- Efficient protection against gloss loss and cracking of coatings
- Low basicity aminoether (NOR) HALS, permits formulating in acid catalyzed coatings and coatings containing acidic pigmentation
- Low volatility

Chemical Structure

Decanedioic acid, bis (2,2,6,6-tetramethyl-1-(octyloxy)-4-piperidiny) ester

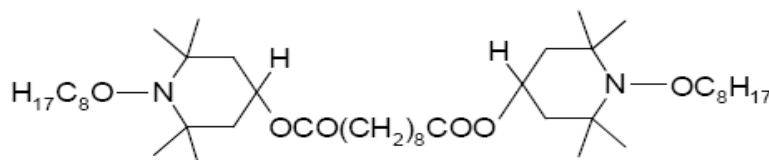

Properties

Typical Properties

Appearance		clear, slightly yellow liquid
CAS No.		129757-67-1
Molecular weight		737
Density at 20°C	g/cm ³	0.97
Viscosity at 20°C	cps	2,900 – 3,100
<u>Miscibility at 20°C (g/100g solution):</u>		
Most commonly used paint solvents		> 50
Water		< 0.01

These typical values should not be interpreted as specifications.

Applications

Tinuvin 123 has been developed especially for high solids, acid catalyzed automotive and industrial coatings, such as two-coat metallic thermosetting acrylate systems or one-coat opaque thermosetting acrylate and polyester coatings. Its low basicity prevents possible interactions with acidic paint ingredients such as catalysts. Its efficiency provides significant improvement in coatings performance by minimizing paint defects such as cracking and gloss reduction for clear coats as well as chalking for pigmented paints.

Tinuvin 123 is recommended for applications such as:

- Automotive and industrial coatings
- Decorative paints and wood stains or varnishes

In addition, Tinuvin 123 may be used in a variety of other binders and applications such as:

- Alkyd/acrylic air drying automotive refinish paints
- Alkyd oxidative drying paints and varnishes
- Two-pack non-isocyanate coating technologies

Its performance can be significantly improved when used in combination with a UV absorber.

In automotive coatings, combinations of Tinuvin 123 with the UV absorbers Tinuvin 384, Tinuvin 1130, Tinuvin 928, or Tinuvin 400 will significantly improve the weathering resistance and provide superior protection against gloss reduction, cracking, color change, blistering, and de-lamination. The light stabilizers may be added in two-coat applications to both the base and the clear coat.

In wood coatings, combinations of Tinuvin 123 with the UV absorbers Tinuvin 384 or Tinuvin 1130 have been found highly effective in air drying alkyd-based formulations. The light stabilizer blends can be added to film forming as well as decorative penetrating stains.

The amount of Tinuvin 123 required for optimum performance should be determined in laboratory trials covering a concentration range.

Recommended Concentrations (concentrations are based on weight Tinuvin percent binder solids)	<u>Application</u>	<u>Weight % of Tinuvin 123</u>
	Automotive and industrial coatings	0.5%- 2% + 1%- 3% Tinuvin 384, Tinuvin 1130, 928, or Tinuvin 400
	Decorative wood coatings	0.5% – 2% + 1%- 3% Tinuvin 384 or Tinuvin 1130

Safety

General

The usual safety precautions when handling chemicals must be observed. These include the measure described in Federal, State and Local health and safety regulations, thorough ventilation of the workplace, good skin care, and wearing of protective goggles.

Safety Data Sheet

All safety information is provided in the Safety Data Sheet for Tinuvin 123.

Storage

Please refer to the "Handling and Storage of Polymer Dispersions" brochure.

Important

The descriptions, designs, and data contained herein are presented for your guidance only. Because there are many factors under your control which may affect processing or application/use it is necessary for you to make appropriate tests to determine whether the product is suitable for your particular purpose prior to use. **NO WARRANTIES OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE, ARE MADE REGARDING PRODUCTS DESCRIBED OR DESIGNS, OR INFORMATION SET FORTH, OR THAT THE PRODUCTS, DESIGNS, OR DATA MAY BE USED WITHOUT INFRINGING THE INTELLECTUAL PROPERTY RIGHTS OF OTHERS. IN NO CASE SHALL THE DESCRIPTIONS, DATA OR DESIGNS PROVIDED BE PRESUMED TO BE A PART OF OUR TERMS AND CONDITIONS OF SALE.** Further, you expressly understand and agree that the descriptions, designs, and data furnished by BASF hereunder are given gratis and BASF assumes no obligation or liability for same or results obtained from use thereof, all such being given to you and accepted by you at your risk.

Tinuvin is a registered trademark of BASF Group.

© BASF Corporation, 2019



Responsible Care®
Good Chemistry at Work

BASF Corporation is fully committed to the Responsible Care® initiative in the USA, Canada, and Mexico.

For more information on Responsible Care® go to:

U.S.: www.basf.us/responsiblecare_usa

Canada: www.basf.us/responsiblecare_canada

México: www.basf.us/responsiblecare_mexico

BASF Corporation
Dispersions and Resins
11501 Steele Creek Road
Charlotte, North Carolina 28273
Phone: (800) 251 – 0612
Email: CustCare-Charlotte@basf.com
Email: edtech-info@basf.com
www.basf.us/dpsolutions